


ENGLISH

Quick start guide	3
Frequently Asked Questions (FAQ)	3
Tech Specs	3
Audio	3
Wireless connectivity	3
Audio input	3
MicroSD and USB playback	3
Power supply	3
Battery	3
Weight and measurements	4
Care and maintenance	4
Warranty	4

ENERGY♥SYSTEM

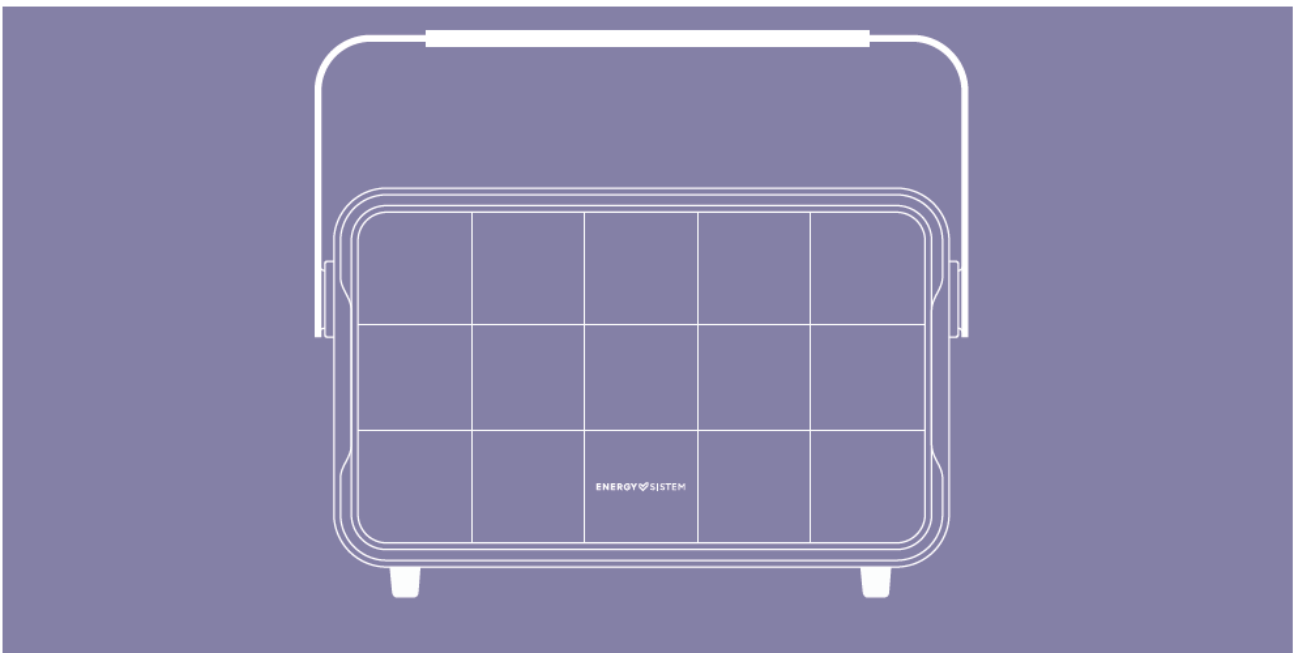

Thank you for trusting us and purchasing your new *Classy Speaker*. We hope you enjoy it.

Quick start guide

Consult the quick guide by clicking [here](#).

Frequently Asked Questions (FAQ)

- **What is the sound power of my Energy Classy?**
With the power cable connected the power output is 150W RMS. When the power cord is disconnected and the speaker is powered from the internal battery the maximum power will be limited to 100W.
- **What is the function of the B button? What is the function of the B button?**
The B button enables a bass boost equalization mode commonly known as Bass Boost.
- **How can I check the battery level?**
Short press the power button (1 click) and the red LED segments will indicate the battery level.
- **How can I jump from folder to folder of the USB memory content?** When you are listening to music from the external USB memory you can skip folders by pressing and holding the M button.

Tech Specs

Audio

- 2.1 stereo sound system
- Power: 150 W
- 1 x 5-inch, 100 W subwoofer
- 2 x 2-inch, 25 W tweeter speakers
- Passive radiators: 1 diaphragm at base
- Frequency response: 45 Hz ~ 20 kHz
- Integrated DSP
- Digital equalizer.

Wireless connectivity

- Bluetooth version 5.3, class II
- Working frequency: 2.4 GHz
- Maximum signal strength: < 20 dBm
- Supported profiles: A2DP / AVRCP
- Codecs supported: SBC
- Up to 20 meters range

Audio input

- 3.5mm stereo mini jack auxiliary audio input

MicroSD and USB playback

- USB external memory player up to 128 GB capacity
- Supported formats: MP3 / WAV / FLAC / WMA
- Supported file system: FAT32 / exFAT
- Folder pass-through function

Power supply

- AC/DC power supply: 100 ~ 240 V / 50 ~ 60 Hz
- Connector to device: IEC
- Connector to home network: EU plug
- Power cable length: 150 cm

Battery

- Capacity: 4500 mAh / 7.4 V

- Type: lithium-ion
- Autonomy at medium volume: 10 hours
- Charging time: 1.5 hours
- Charging system: IEC

Note: *Battery life varies according to the volume level selected and the type of music played.

Weight and measurements

- 3.340 Kg
- 280 x 180 x 170 mm

Care and maintenance

- Do not expose your *Classy Speaker* to shock, dust, humidity or high temperatures.
- Do not use corrosive or abrasive cleaning agents.
- Do not disassemble. Any repair must be done exclusively by qualified Energy System Technology, S.A. personnel.
- Be sure to keep your *Classy Speaker* turned off when not in use and do not leave it for a long period of time with the battery completely discharged.

Warranty

You can check the warranty conditions [here](#).